


CHAIN-链条

G80 Lifting Chain-G80起重链

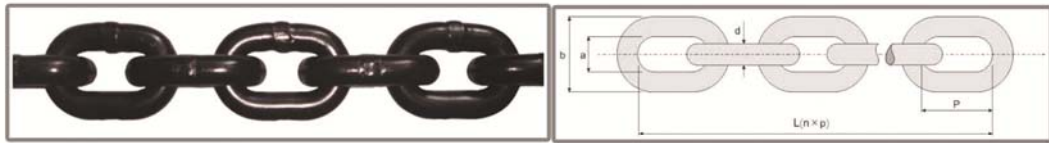


d mm	p mm	Width mm		Kg per m	Working Load Limit (t)	Proof testing Load (KN)	Min. Breaking Load (KN)
		a	b				
6	18	7.8	22.2	0.80	1.12	28.3	45.2
7	21	9.1	25.9	1.07	1.5	38.5	61.6
8	24	10.4	29.6	1.38	2	50.3	80.4
10	30	13	37	2.2	3.15	78.5	126
13	39	16.9	48.1	3.8	5.3	133	212
16	48	20.8	59.2	5.63	8	201	322
18	54	23.4	66.6	7.3	10	254	407
19	57	24.7	70.3	8.1	11.2	284	454
20	60	26	74	8.6	12.5	314	503
22	66	28.6	81.4	10.2	15	380	608
23	69	29.9	85.1	12	16	415	665
25	75	32.5	92.5	14.1	20	491	785
26	78	33.8	96.2	15.2	21.2	531	819
28	84	36.4	104	17.6	25	616	985
32	96	41.6	118	23	31.5	804	1290
36	108	46.8	133	29	40	1020	1630

Deseen International
G80 chain and G70 Chain

CHAIN-链条

Grade 70 Chain-G70链条
 Standard: AS/NZS 4344
 Galvanized

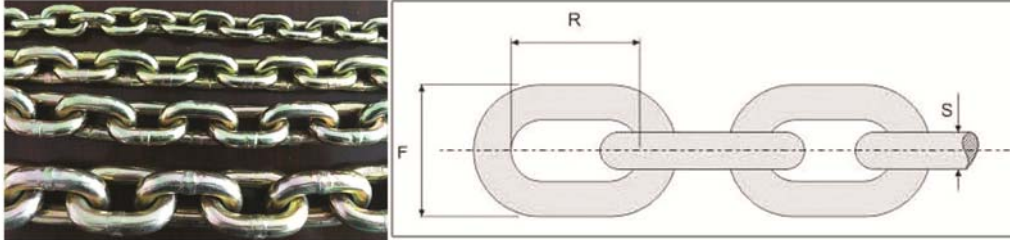

Size mm	Link Dimension (mm)			Kg per m	Lashing Capacity (kg)	Min. Breaking Load (KN)
	S	R	F			
6.0	6.0	18.9	22.05	0.80	2300	44.1
7.0	7.0	21.3	24.85	1.10	2900	55.9
7.3	7.3	24.0	26.6	1.16	3000	58.9
8.0	8.0	24.0	28.00	1.43	3800	73.6
10.0	10.0	30.0	35.00	2.23	6000	118
13.0	13.0	39.0	45.50	3.75	9000	176

We also supply G70 chain kit. The ending fittings can match lug link, grab hook, slip hook and claw hook.




Chain Size mm	Chain Length m	Lashing Capacity Kg
6	5-9	2300
7.3	5-9	3000
8	5-9	3800
10	5-9	6000
13	5-9	9000

Deseen International
G80 chain and G70 Chain

Chain


CE ISO9001 / 2000

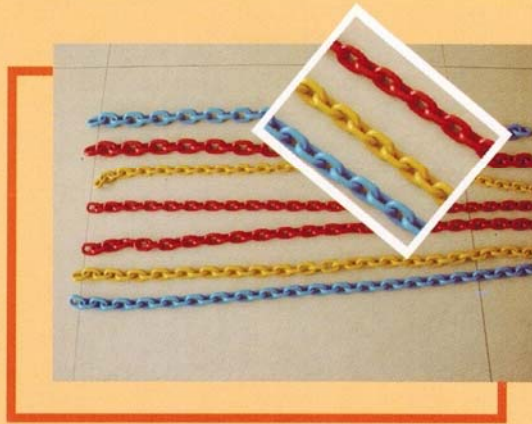

Deseen International
G80 chain and G70 Chain

Chain





CE ISO9001 / 2000

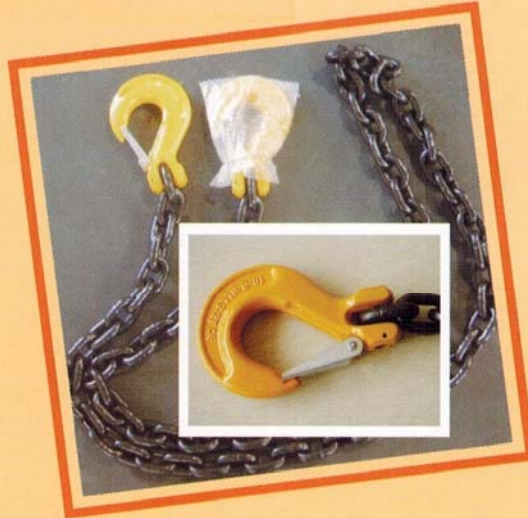

Deseen International
G80 chain and G70 Chain

Chain

CE ISO9001 / 2000

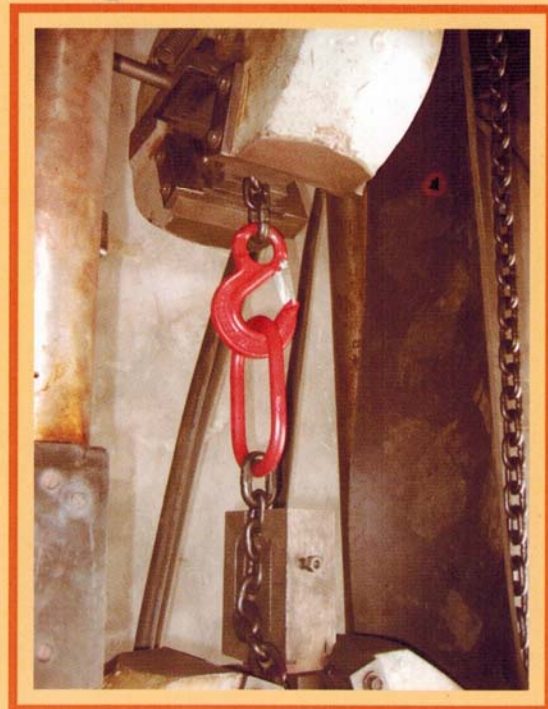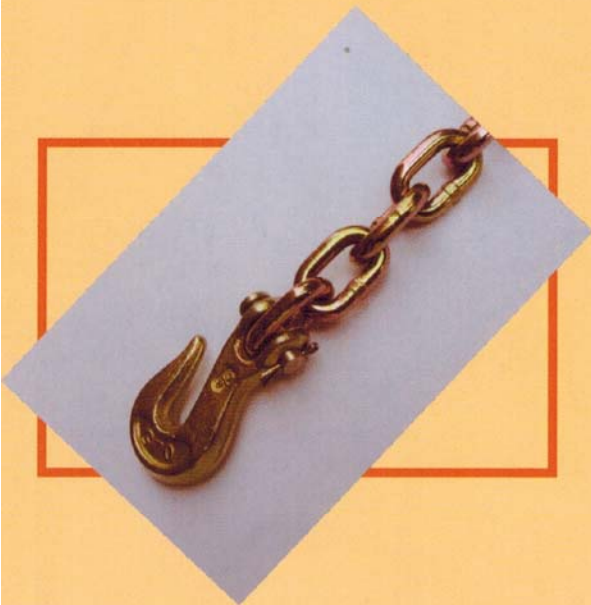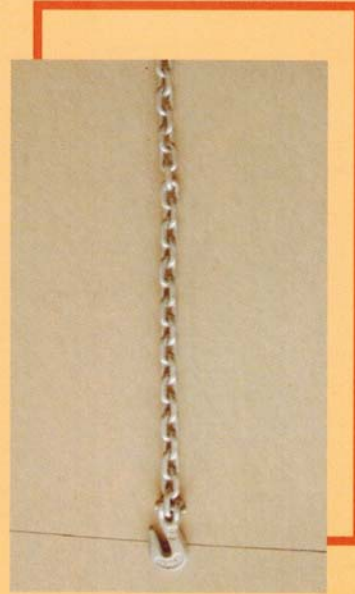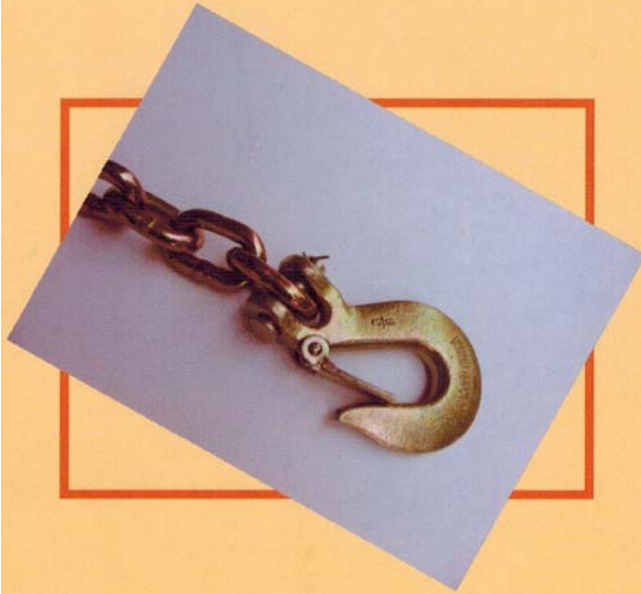

CHAIN-链条

Packing for chain and chain kit.. And package can be designed as per customer's requirement.

